

OPTEX

INSTRUCTION MANUAL


S-SERIES PHOTOELECTRIC SENSOR

- Thank you for purchasing S series photoelectric sensor. Check that the specifications agree with yours.
- Please read this manual through before using the sensor, and retain it for future reference.


SPECIFICATIONS

	Through beam	Diffused ref.	Retro-ref.	BGS	Transparent objects	BGS small spot
Cable type	ST-400 (N.P)	SD-20 (N.P)	SR-150 (N.P)	BGS-S08 (N.P)	SR-Q50 (N.P) W	BGS-S03N
Connector type	ST-400C (N.P)	SD-20C (N.P)	SR-150C (N.P)	BGS-S08C (N.P)	SR-Q50C (N.P) W	—
Detecting distance	4m	20cm	1.5m	10~80mm	50cm	8~30mm
Supply voltage	DC10~30V					
Current consumption	30mA max.	20mA max.				
Response time	0.5ms max.					
Control output	NPN/PNP Open collector DC30V 100mA max.					
Operation mode	Light ON/Dark ON selectable by wiring					
Sensitivity adjustment	1 turn volume		5 turn (endless)		1 turn volume	5 turn (endless)
Indicator	Light indicator (red)					
Ambient temp./humidity	-25~55°C / 35~85%PH					
Protection category materia	IP67 / Case : PSF+PBT (glass included) Front cover : PC (PMMA for Retro-ref)					


INPUT AND OUTPUT CIRCUIT DIAGRAMS

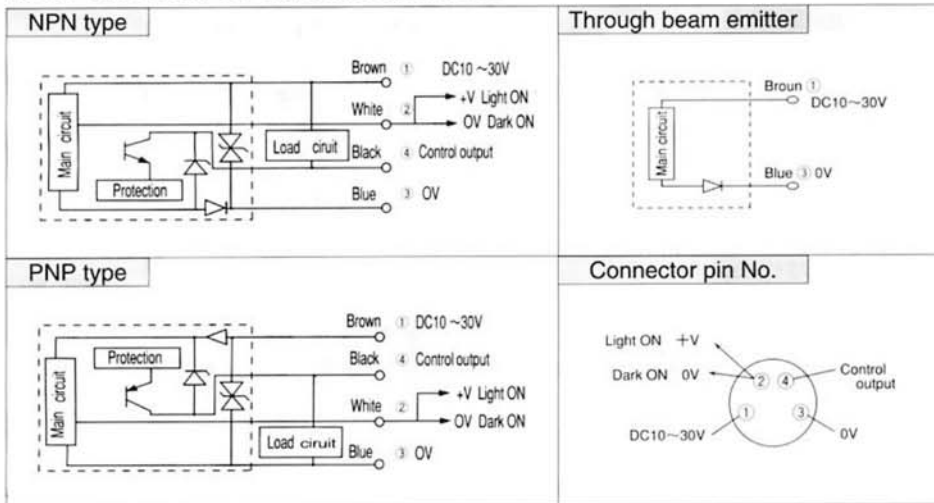

DIMENSIONS

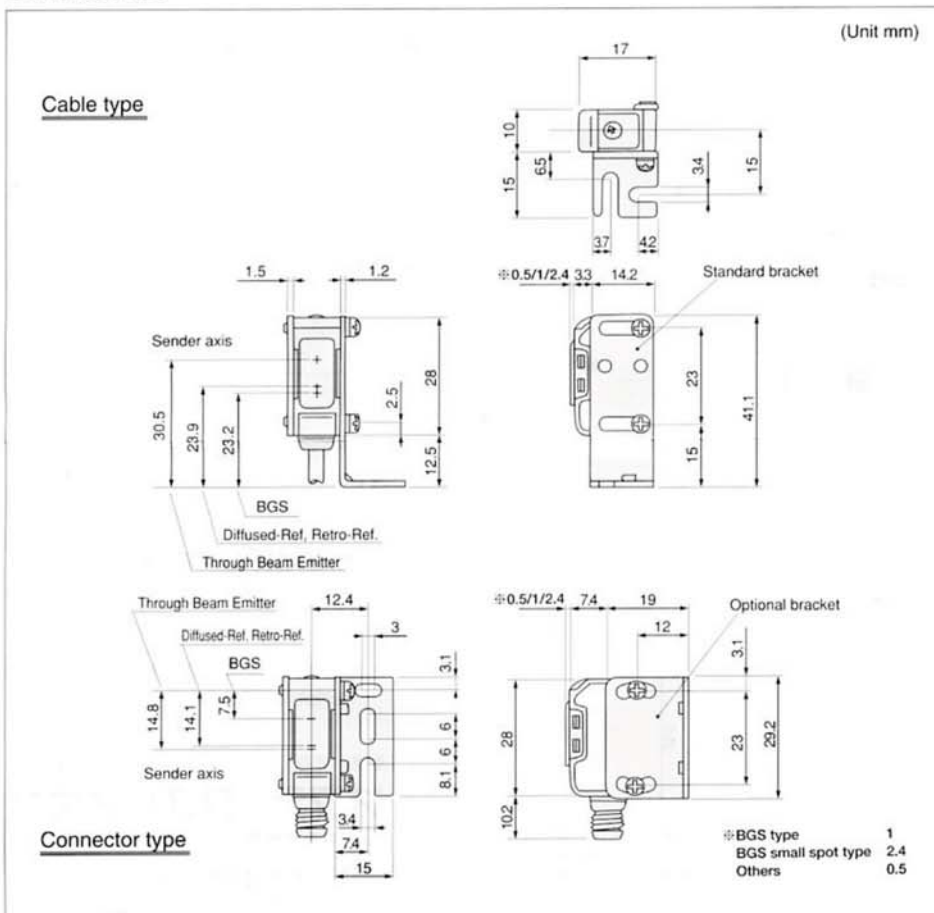

ACCESSORIES

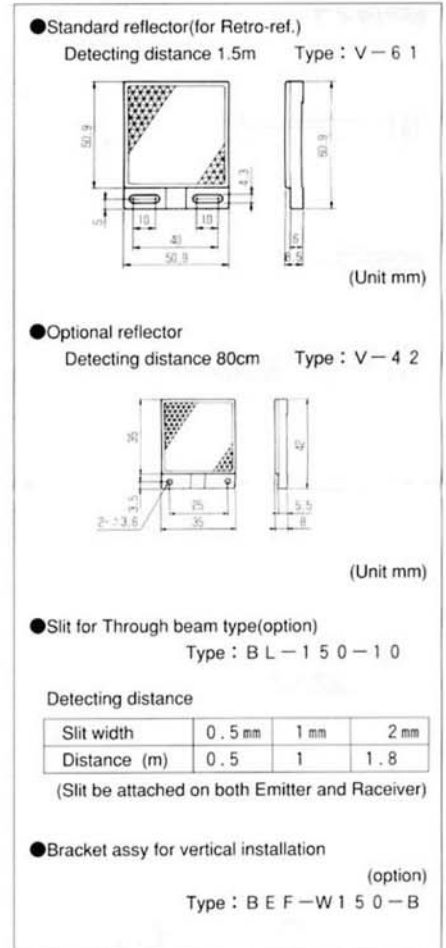

Developed by

• **OPTEX CO., LTD.**

Manufactured by



Ramco Innovations

800.280.6933

www.Optex-Ramco.com